

WAVLINK 睿因



see the world

Everything Mesh 设置指南

Table of contents:

- [Everything Mesh 设置指南](#)
 - [Everything Mesh 设置指南](#)
 - [Everthing Mesh 支持型号](#)
 - [如何添加Mesh设备](#)

Everything Mesh 设置指南

This chapter contains the following sections :

- [Everthing Mesh 支持型号](#)
- [如何添加Mesh设备](#)

Everything Mesh 设置指南

Everthing Mesh 支持型号

型号	Mesh 路由	Mesh 中继	LAN 回传	Pair键名
WN536AX6-A/MIGHTY LX2	✓	✓	✓	PAIR
WN531AX3/LUX DX7	✓	✓	✓	PAIR
WN586X3/MIGHTY EX1	✓	✓	✓	PAIR/Reset
WN587X3/MIGHTY EX2	✓	✓	✓	PAIR/Reset
WN583AX3/AERIAL D6X	✓	✓	✓	WPS
WN573HX3/AERIAL HD9/Greenwood 6 3000P	✓	✓	✓	PAIR/Reset
WN530BE1-A/Skyline Stream 4	✓	✓	✓	PAIR/Reset
WN530BE2-A/Skyline Stream 5	✓	✓	✓	PAIR/Reset
WNF100X3NR-B/QuantumWave 5G Base	✓	✗	✗	PAIR
WN573HX1-B/AERIAL HD6/Greenwood 6 1800P	✓	✓	✓	PAIR/Reset
WN592AX6-A/Giant Stream6	✓	✓	✓	PAIR
WN586X3-B/MIGHTY EX1 Pro	✓	✓	✓	PAIR/Reset

型号	Mesh 路由	Mesh 中继	LAN 回传	Pair键名
WN588HE6D-A/AERIAL 4G6	✓	✗	✗	PAIR/Reset
WN588HE4D-A/AERIAL HD9D	✓	✗	✗	PAIR/Reset
WN572HE4-A/WING 12ML	✓	✗	✗	PAIR/Reset
WN588HX3-B/AERIAL HD9S/Greenwood 6 3000S	✓	✓	✓	PAIR/Reset
WN588HA2-A/AERIAL HD8S	✓	✓	✓	PAIR/Reset
WN573HP3-A/AERIAL HD10/Greenwood 6 3000D	✓	✓	✓	PAIR/Reset
WN573HP3T-A/AERIAL HD10T	✓	✓	✓	PAIR/Reset
WN572HP3-B/AERIAL HD4/Greenwood 5 1200G	✓	✓	✓	PAIR/Reset
WN583HX3-A/AERIAL D6XH	✓	✓	✓	WPS
WN583BE1/AERIAL D3E	✓	✓	✓	WPS
WN5372BE1(HALO Nexus X1)/WN5372BE2(HALO Nexus X2)/WN5372BE3(HALO Nexus X3)	✓	✓	✓	PAIR
WN551X1-A(HALO Pulse X1)/NN551X2-A(HALO Pulse X2)/WN551X3-A(HALO Pulse X3)	✓	✓	✓	PAIR
WN551X1-B(CUBE AIR X1)/WN551X2-B(CUBE AIR X2)/WN551X3-B(CUBE AIR X3)	✓	✓	✓	PAIR
WN553X1-A(CUBE PRO X1)/WN553X2-A(CUBE PRO X2)/WN553X3-A(CUBE PRO X3)	✓	✓	✓	PAIR

型号	Mesh 路由	Mesh 中继	LAN 回传	Pair键名
WN553X1-B(HALO AIR X)/N553X2-B(HALO AIR X2)/WN553X3-B(HALO AIR X3)	✓	✓	✓	PAIR

如何添加Mesh设备


如果您需要添加更多的mesh设备来改善家中的网络，只需将新的mesh设备与现有网络配对即可。支持mesh的路由可连接多达6个mesh WiFi节点创建一个稳定的mesh网络。

注意:

在添加**mesh**设备之前，请确保：主路由已成功配置且可正常访问互联网。要添加的**mesh**子路由处于出厂设置状态。

选择1：网页配置

- 1. 登录www.wavlogin.link 或 www.waplogin.link。
- 2. 点击**更多设置->Mesh网络->Mesh设备** or **高级设置->Mesh网络**。
- 3. 点击**添加**，按照提示操作即可。

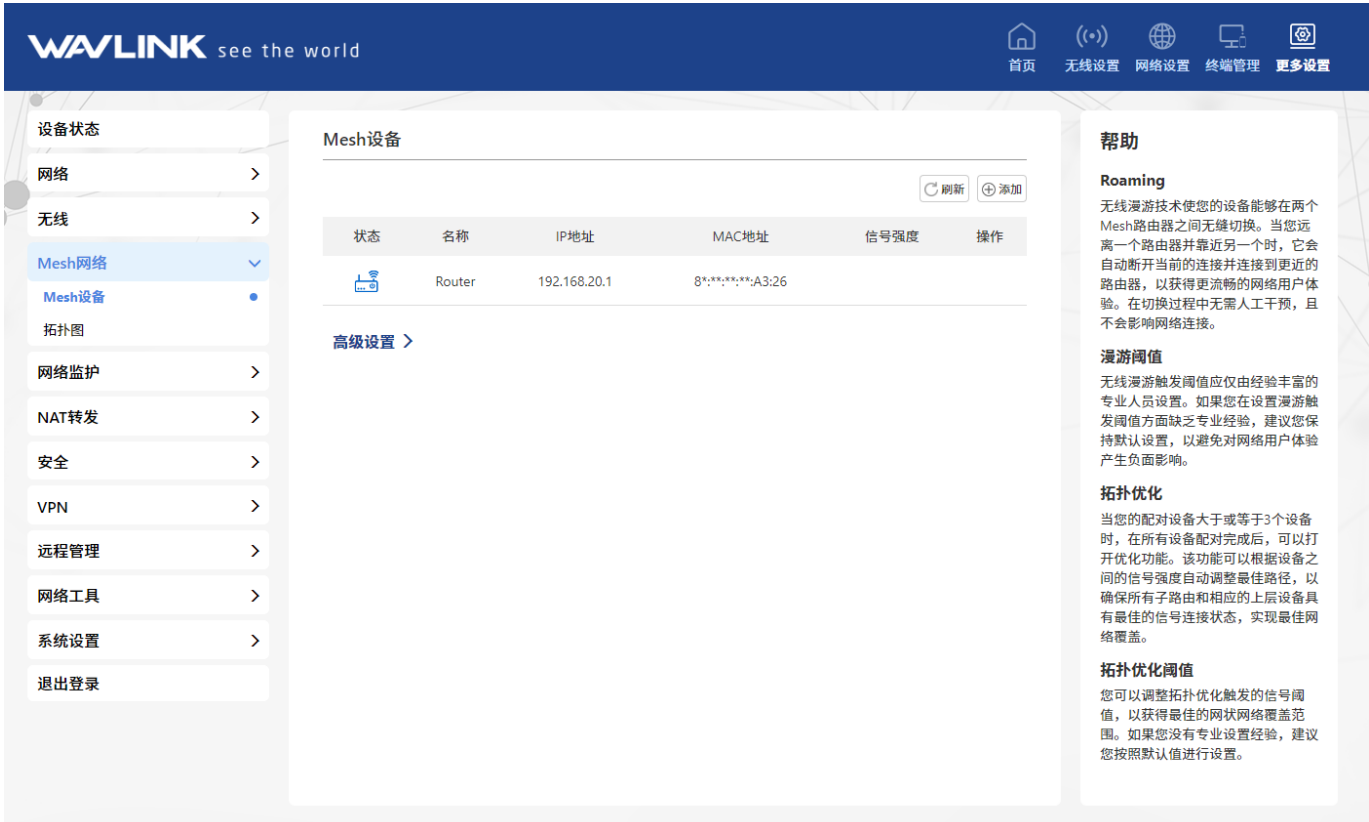

< Mesh网络

添加

Mesh拓扑图

	名称	IP	MAC地址	信号强度	删除
	Router	192.168.10.1	8*:8*:8*:00:02		


注意：

未扫描到要添加的设备：①请检查主路由是否可正常访问互联网。

②观察Mesh中继的LED灯，确认是否Mesh子路由处于配对状态。

③重新扫描。

选择2: Pair键配对 配置好主路由后，当主路由有网络时，按住Mesh主路由和Mesh子路由的配对键2秒，当Mesh子路由的状态灯蓝色长亮时，表示配对成功。

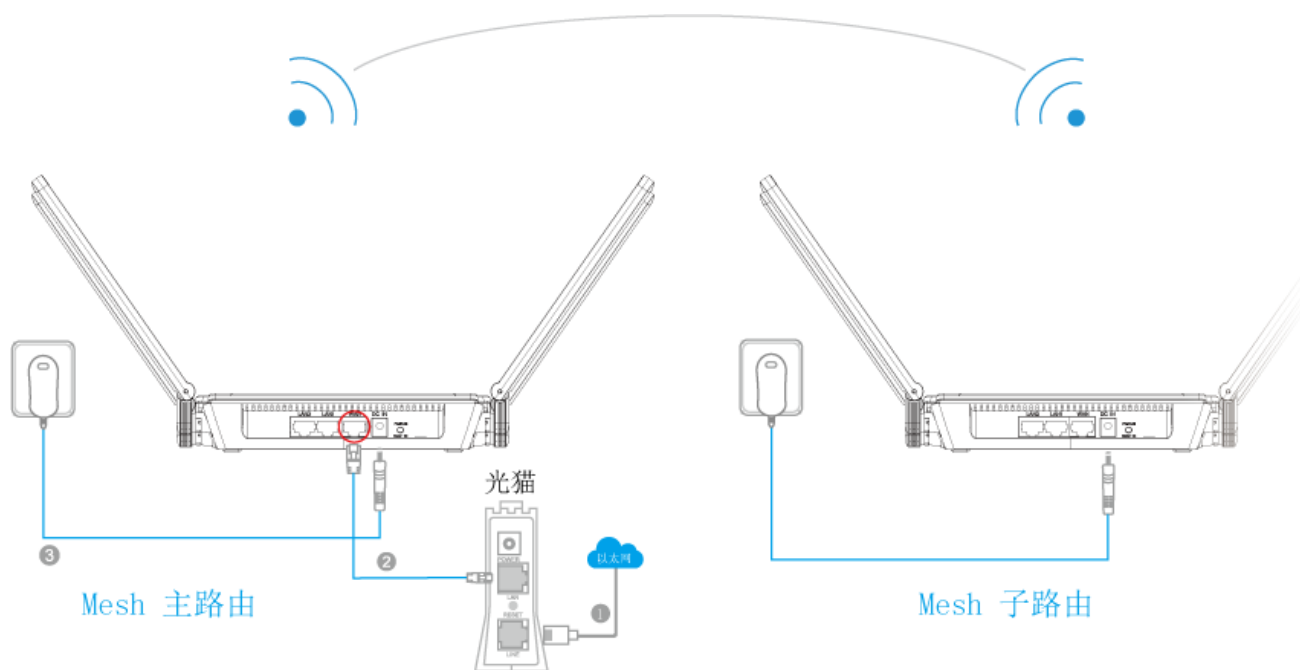


注意：

不同型号的产品，Pair键和LED的状态会有不同，开始配对前请确认Pair键的位置。

选择3: LAN回传

1. 如果无线信号因复杂环境而减弱，可以尝试LAN回传。

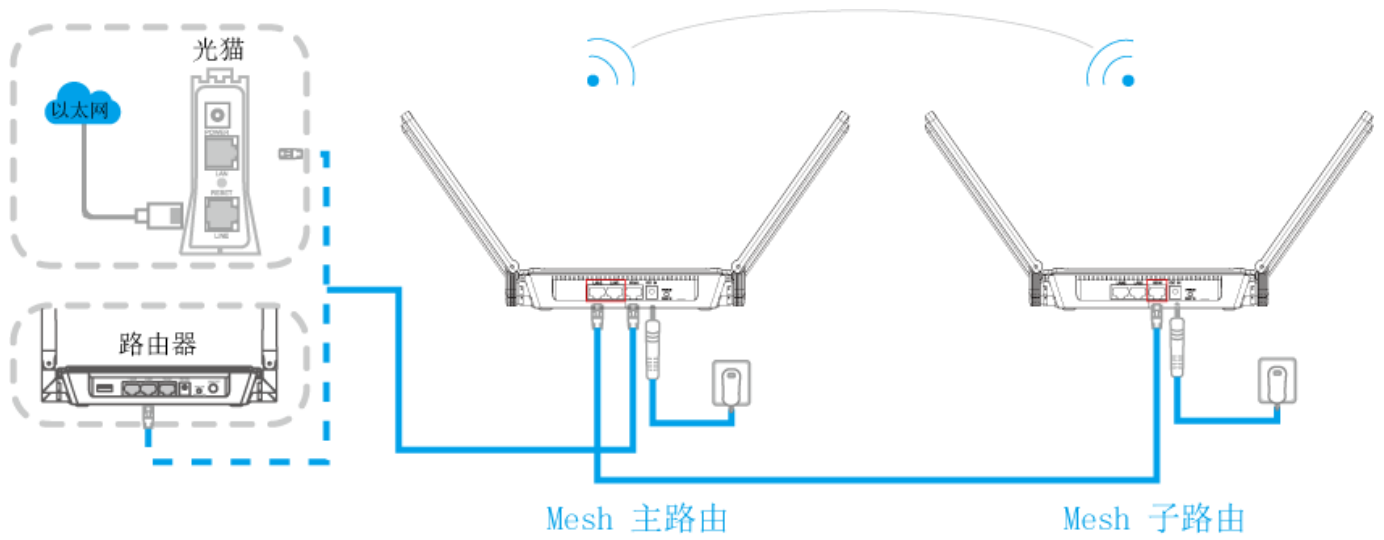

2. Mesh主路由与Mesh子路由配对后，将Mesh子路由的**WAN**口连接到Mesh主路由的**LAN**口。

注意：本指南中的图片皆参考WAVLINK产品型号MIGHTY EX1。